(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification⁷: G02F 1/13363, 1/1347, 1/23

(21) International Application Number: PCT/GB00/05005

(22) International Filing Date:
22 December 2000 (22.12.2000)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
9930762.1   29 December 1999 (29.12.1999)   GB

(71) Applicant (for all designated States except US): THE TECHNOLOGY PARTNERSHIP PLC [GB/GB]; Melbourn Science Park, Cambridge Road, Melbourn, Royston, Herts SG8 6EE (GB).

(72) Inventors; and

(75) Inventors/Applicants (for US only): LARGE, Timothy [GB/GB]; 23 Dengaine Close, Paworth Everard, Cambridge CB3 8UH (GB). NEW, Mary [GB/GB]; The Technology Partnership plc, Melbourn Science Park, Cambridge Road, Melbourn, Royston, Herts SG8 6EE (GB). CARMICHAEL, Allan [GB/GB]; The Technology Partnership plc, Melbourn Science Park, Cambridge Road, Melbourn, Royston, Herts SG8 6EE (GB).

(74) Agent: GILL JENNINGS & EVERY; Broadgate House, 7 Eldon Street, London EC2M 7LH (GB).

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.

[Continued on next page]

(54) Title: TUNEABLE LIQUID CRYSTAL OPTICAL FILTER
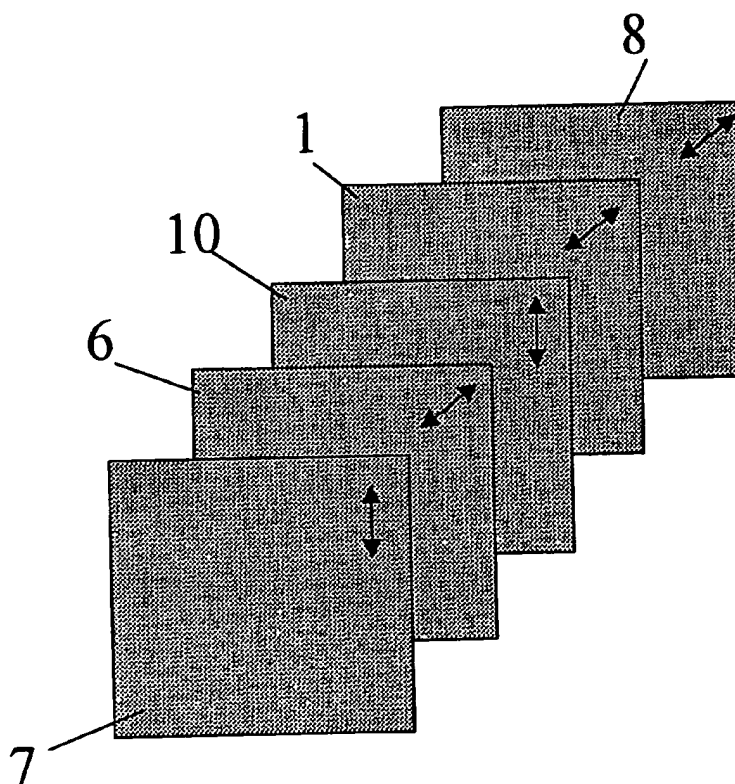
(57) Abstract: A tuneable optical filter having a variable wavelength transmittance. The filter comprises a pre-polariser, a post-polariser and a birefringent plate positioned between the pre-polariser and the post-polariser. A twisted nematic liquid crystal cell (TN LCD) is positioned between the pre-polariser and the post-polariser, the TN LCD being controlled, in use, to tune the filter. A quarter wave plate is positioned adjacent the birefringent plate.

(84) Designated States *(regional):* ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published:

— *With international search report.*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

1

Tuneable Liquid Crystal Optical Filter

This invention relates to the field of optical
wavelength filtering. The invention provides an optical
5   filter whose colour can be tuned, for example by applying
an electronic drive signal to a standard twisted nematic
liquid crystal display (TN LCD). When used in combination
with a light source, it may be used for visual
applications, such as colour adjustable lighting and
10   information display systems. In such applications, it is
often desirable to have a single light source which can be
electronically adjusted to provide a range of different
colours. Examples include display or architectural lighting
systems, shop window displays, advertising displays,
15   computer screens and overhead projector systems. High
optical transmission is desirable in many such
applications.

One known way of providing tuneable colour from a
single light source is to spatially divide the light from
20   a white light source into three channels and filter each
channel with red, green and blue filters respectively. Re-
mixing the light with variable attenuation (for example by
using a TN LCD and polarisers as described above) in each
channel allows the user to produce a wide variety of
25   colours.

This system is used in colour LCD panels, in which a
dye layer is used to mask areas of, or all of, the display.
A great range of colours can be produced, but with
considerable loss in optical efficiency.

30   The disadvantages of this type of system are that the
transmission of each colour filter is at maximum only 30%,
and the means of providing attenuation are also lossy. In
the example of a colour LCD, the filter losses combined
with polariser losses typically make the overall
35   transmission 10% maximum.

According to the present invention there is provided

2

a tuneable optical filter having a variable wavelength transmittance comprising:

a pre-polariser;

a post-polariser;

5   a birefringent plate positioned between the pre-polariser and the post-polariser;

a twisted nematic liquid crystal cell (TN LCD) positioned between the pre-polariser and the post-polariser the TN LCD being controlled, in use, to tune the filter; and

10   and

a quarter wave plate positioned adjacent the birefringent plate.

A filter according to the invention has a transmission three times that of a conventional colour liquid crystal

15   display. It also utilises standard LCDs and so can be easily manufactured from readily available low cost components.

One of the pre-polariser and the post-polariser may have its polarising axis inclined at substantially 45° to

20   the optical axis of the birefringent plate. A second TN LCD may be provided such that either birefringent plate is positioned between the TN LCDs or the two TN LCDs are positioned in series.

The pre-polariser may comprise at least one sheet of

25   dielectric material configured as either a straight plate, a "V" shape or a series of adjacent "V" shapes. In each case the angles of portions of the at least one sheet are inclined at the Brewster angle to the incoming light. The pre-polariser may comprise a dichroic polariser and it may

30   be a heat resistant pre-polariser.

The birefringent plate may be a two wave plate. At least one of the group of pre-polariser and post-polariser may be wavelength independent and the birefringent sheet may be wavelength independent in terms of amplitude

35   modulation.

A lighting system may be provided, which comprises a light source and an optical filter as previously defined.

3

The lighting system may further comprise a colour selection means and the light source may be attached to a heat resistant pre-polariser to form a removable, disposable, self contained unit.   The lighting system may further
5   comprise a photocell which receives light from the light source and converts this light to energy, to drive the optical filter.

The ability to produce wavelength selectivity using a normally wavelength independent TN LCD allows a simple
10   and low cost tunable optical filter. Because the filter is tuneable the efficiency of the filter is enhanced over conventional three colour LCD displays, being three times more efficient. Low power consumption and solid state operation lead to higher levels of reliability and the
15   potential for remote operation and powering from ambient or local external light sources.

Examples of the present invention will now be described with reference to the accompanying drawings, in which:-
20   Figure 1 is a schematic diagram of a twisted nematic liquid crystal display (TN LCD);

Figure 2 is a schematic diagram of an example filter;

Figure 3 is a schematic diagram illustrating the
25   orientation of the components of the filter of Figure 2;

Figure 4 shows a filter incorporating a quarter wave birefringent plate in accordance with the present invention;

Figures 5 and 6 show further example filters of the
30   invention with two TN LCDs;

Figure 7 illustrates a typical application of the filter of the present invention;

Figure 8 illustrates a further application of the filter of the present invention;
35   Figure 9 is a schematic diagram which illustrates how light of unwanted polarisation may be diverted from the filter of earlier figures;

4

Figure 10 illustrates the effect of a pre-polariser with the filter of earlier figures;

Figures 11, 12 and 13 illustrate alternative pre-polariser structures that may be employed with the invention;

Figure 14 illustrates how air may be used to cool polarisers in the present invention;

Figure 15 illustrates how a fluid cell may be used to cool a polariser in the invention;

Figure 16 shows the use of a sacrificial polariser to protect higher quality polarisers in the invention;

Figure 17 shows how expansion of an incoming beam of illuminating light can control the temperature of a polariser in the invention;

Figure 18 illustrates a typical low power drive circuit that may be employed with the invention;

Figure 19 is a schematic diagram of a filter according to the invention for use in a lighting system; and

Figures 20 and 21 show examples of how the efficiency of a lighting system according to the invention may be increased by recycling the unused polarised light.

Referring to figure 1, a twisted nematic liquid crystal display 1 (TN LCD) is conventionally used to provide variable attenuation. The TN LCD 1 comprises a liquid crystal 2 aligned in a cell of two substantially flat parallel glass plates 3. The orientation of the liquid crystal 2 in the cell is such that the molecular axes of the liquid crystal 2 lie in the plane of the cell and form a half pitch of a helix across the cell, such that the molecular axes on opposite sides are perpendicular.

Polarised light 4 entering the cell is guided by the molecular axes of the liquid crystal 2 and light 5 exits from the cell with its polarisation state rotated by 90 degrees. When a sufficient driving voltage is applied

5

across the liquid crystal layer 2 the molecular axes
substantially align with the electric field and the
polarised light 4 passes through the cell unchanged.
Polarisers placed outside the cell 1 with appropriate
5   orientation can therefore cause the cell 1 to go from
light to dark or vice versa, on application of a
sufficient driving voltage, depending on the orientation
of the polarisers.

This well known technology is used to produce
10   monochromatic displays for many applications including
digital watches, computers, digital meters, car
dashboards and so on.

A more complex filter is illustrated schematically
in Figure 2. Here, a conventional TN LCD 1 is used in
15   combination with a birefringent element 6, pre-polariser
7 and post-polariser 8. Birefringent filters have been
known for many years, having first been used in astronomy
for the investigation of the spectrum of stars by the
astronomer Lyot. They have the property, when
20   appropriately constructed, of allowing a transformation
of polarisation to be converted to a change in colour.

The birefringence of a birefringent plate 6 retards
one polarisation more than the other, with the relative
retardation (and therefore the output polarisation)
25   depending on the birefringence, thickness and wavelength
of the light passing through the plate. For any given
plate and a fixed input polarisation, the output
polarisation depends on the wavelength and therefore,
viewed through an analysing polariser, the plate is
30   coloured. If the input polarisation is rotated, this
colour changes.

We illustrate this with a detailed example, shown
schematically in Figure 3. Let us assume that a
birefringent filter consists of a pre-polariser 7,
35   birefringent plate 6, and post-polariser 8. The pre-
polariser 7 has its polarising axis inclined at an
adjustable angle 9 to the optical axis of the

6

birefringent plate 6. The post-polariser 8 has its polarising axis inclined at +45 degrees to the optical axis of the birefringent plate 6.

When the adjustable angle 9 is +45 degrees, the
5 polarised light from the pre-polariser is resolved equally into the two principal axes of the birefringent plate 6. On passing through the plate, the two resolved polarisation states undergo a relative phase shift which depends on the plate thickness, the plate birefringence,
10 and the wavelength of the light. The two polarisation states can be represented as:

$$E_{ordinary} = (E_{in} / \sqrt{2}) \cdot \exp(-i \cdot \Delta n \cdot \pi \cdot t / \lambda)$$

and

$$E_{extraodinary} = (E_{in} / \sqrt{2}) \cdot \exp(-i \cdot \Delta n \cdot \pi \cdot t / \lambda)$$

15 Where Δn is the birefringence, t the plate thickness and λ the wavelength of the light passing through the plate.

When these two polarisation states fall on the post-polariser 8 they are resolved into the principal axis of
20 the post polariser. The output state is therefore given by:

$$E_{out} = (E_{in} / 2)\exp(-i \cdot \Delta n \cdot \pi \cdot t / \lambda) + (E_{in} / 2)\exp(i \cdot \Delta n \cdot \pi \cdot t / \lambda)$$

25 This equation can be re-expressed as:

$$E_{out} = E_{in} \cdot \cos(\Delta n \cdot \pi \cdot t / \lambda)$$

and the transmitted intensity I_{out} is therefore given
30 by:

$$I_{out} = I_{in} \cos^2(\Delta n \cdot \pi \cdot t / \lambda)$$

where I_{in} is the incident intensity.

It is clear that for wavelengths which satisfy the equation:

$$\Delta n \cdot t = m \cdot \lambda$$

where m is any integer, all the power passes through the filter. For wavelengths which satisfy the equation:

$$\Delta n \cdot t = (m - 1/2) \cdot \lambda$$

no power passes through the filter.

In this way the filter is wavelength selective. For example, if m=2 at 520nm wavelength (a so-called two-wave birefringent plate) the filter efficiently passes light with 530nm wavelength (green) but not light with wavelengths of 693nm (red) and 416nm (blue).

If the adjustable polariser angle 9 coincides with either of the principal axes of the birefringent plate 6, the polarisation state leaving the birefringent plate 6 is unmodified regardless of wavelength, and is incident on the post-polariser 8 at 45 degrees to its principal axis. Thus half the light is transmitted, without wavelength dependence.

If the adjustable polariser angle 9 is -45 degrees, the light is transmitted according to the equation:

8

$$E_{out} = E_{in} \cdot \sin(\Delta n \cdot \pi \cdot t / \lambda)$$

and the transmitted intensity I_{out} is therefore given
by:

$$I_{out} = I_{in} \cdot \sin^2(\Delta n \cdot \pi \cdot t / \lambda)$$

where I_{in} the incident intensity.

For the example of a two wave birefringent plate,
this means that red and blue are transmitted but green is
not, resulting in a magenta transmission colour.

Therefore, for a single birefringent plate 6,
rotating the input polarisation by 90 degrees causes the
colour to change from one hue, through grey, to the anti-
hue. In this example, green would change through grey to
magenta. This rotation of input polarisation can be
achieved by placing a TN LCD 1 between a pre-polariser 7,
now with fixed orientation, and the birefringent plate 6.
The same optical effect could be achieved by placing the
TN LCD 1 between the birefringent plate 6 and the post-
polariser 8.

A single two wavelength plate is preferred for
tuneable colour applications because this, in practice,
is found to produce the best combination of colour
saturation and transmission efficiency, but more complex
birefringent networks could, in principle, be used to
produce different wavelength filtering and tuning
responses.

However, the production of a half-intensity,
uncoloured intermediate state is not desirable in many
applications for colour tuneable filters. The present
invention therefore provides a quarter wave, birefringent

9

plate 10 in combination with the first birefringent plate
6 in order to produce colour tuning, so that the colour
for example may change from green through yellow, red and
then to magenta.

5   This improved birefringent filter structure is
illustrated in Figure 4. In this example the quarter wave
birefringent plate 10 is placed before the two wave
birefringent plate 6 with the principal axes relatively
inclined at 45 degrees.

10   It can be seen that if the adjustable pre-polariser
angle 9 is 0 or -90 degrees, the polarising axis of the
pre-polariser 7 coincides with the principal axes of the
quarter wave plate 10, and the quarter wave plate 10 does
not affect the polarisation state passing through it. In
15   this case the light passes unmodified through to the two-
wave birefringent plate 6 and is filtered as in the
previous example, and the filter produces a green or
magenta hue.

         If the adjustable pre-polariser angle 9 is
20   arbitrary, the quarter wave plate 10 converts the
polarisation state passing into the two-wavelength plate
6 into an elliptical form.

         Following the formalism of the previous example, the
input polarisation states to the quarter wave plate 10,
25   resolved along the principal axes of the quarter wave
plate are:

$$E_{ordinary} = E_{in} \cdot \sin(\alpha) \cdot \exp(-i \cdot \Delta n \cdot \pi \cdot t / \lambda)$$

and

30       $$E_{extraordinary} = E_{in} \cdot \cos(\alpha) \cdot \exp(i \cdot \Delta n \cdot \pi \cdot t / \lambda)$$

         Where Δn is the birefringence, t the plate thickness
and λ the wavelength of the light passing through the
quarter wave plate. The angle denoted α is the pre-

polariser angle 9. In this case the plate is conveniently a quarter wave at the centre of the visible spectrum, λ=530nm, so

5        $\Delta n \cdot t = 530/4$ or $\Delta n \cdot t = \lambda_o /4$

In order in simplify the algebra we make the approximation that $\lambda \approx \lambda_o$ so that:

10

$$E_{ordinary} = E_{in} \cdot \sin(\alpha) \cdot (1-i) / \sqrt{2}$$

and

15        $$E_{extraordinary} = E_{in} \cdot \cos(\alpha) \cdot (1+i) / \sqrt{2}$$

These two states are further resolved into the principal axes of the two wave plate 6, so that after the two wave plate the two polarisation states are:

20        $$E_{ordinary} = \left(E_{in} \cos\alpha(1+i)/2 + E_{in} \sin\alpha(1-i)/2 \right) \exp(-i \cdot \Delta n \cdot \pi \cdot t / \lambda)$$

and

$$E_{extraordinary} = \left(E_{in} \cos\alpha(1+i)/2 - E_{in} \sin\alpha(1-i)/2 \right) \exp(i \cdot \Delta n \cdot \pi \cdot t / \lambda)$$

25   When these states reach the post polariser 8 they are further resolved into the polarising axis of the post-polariser 8, so that the transmitted light is given by:

$$E_{out} = E_{extraordinary} / \sqrt{2} + E_{ordinary} / \sqrt{2}$$

30

If we re-arrange the equations above we can show that:

$$(i+1) \cdot \cos\alpha + (1-i) \cdot \sin\alpha = (1+i)\exp(-i \cdot \alpha)$$

and

$$(i+1)\cdot\cos\alpha - (1+i)\cdot\sin\alpha = (1+i)\exp(i\cdot\alpha)$$

and therefore

$$E_{out} = \left(E_{in}\cdot(1+i)/\sqrt{2}\right)\cdot\cos(\Delta n\cdot\pi\cdot t/\lambda - \alpha)$$

and the transmitted intensity I_{out} is therefore given by:

5 $$I_{out} = I_{in}\cdot\cos^2(\Delta n\cdot\pi\cdot t/\lambda - \alpha)$$

where I_{in} is the incident intensity.

From the form of this equation it is clear that as the
angle α changes the wavelength of peak transmission
10   changes according to the equation:

$$\Delta n\cdot t = (m + \alpha/\pi)\cdot\lambda$$

This equation shows that the transmission of the
filter in this form is truly colour tuneable, in that
rotation 9 of the pre-polariser 7 (change in α) results
15   directly in a change in peak transmission wavelength, λ.
Therefore, a quarter wave birefringent plate 10 used
in combination with a two wave birefringent plate 6
produces colour tuning. Rotating the input polarisation
by 90 degrees causes the colour to change from one hue,
20   through a range of hues, to the anti-hue, so that the
colour for example may change from green, through yellow,
red and then to magenta, or from green, through cyan and
blue to magenta depending on the orientation of the
components. In this way the undesirable intermediate grey
25   state of the previous example is avoided.
The rotation of input polarisation can be achieved
by placing a TN LCD 1 between the pre-polariser 7, now
with fixed orientation, and the first birefringent plate
10. The same optical effect could be achieved by placing
30   the TN LCD 1 between the second birefringent plate 6 and
the post-polariser 8.
If two TN LCDs 1 are used in series, the
polarisation rotation can be 180 degrees. In this way a
full sequence of colours, for example green, through
35   yellow, red, magenta, blue, cyan and back to green, can
be produced.

Figure 5 shows an example of such a filter
structure. Figure 5 shows the elements of the filter in
series with the principal optical axes indicated. The
elements are, in turn, the pre-polariser 7, two wave

5   birefringent plate 6, quarter wave birefringent plate 10,
two TN LCDs 1 and the post polariser 8. The two LCDs are
typically driven in parallel with the same electrical
drive signal.

This filter structure is capable of producing a

10   range of hues as described above, but is limited in that
it cannot produce pastel, or unsaturated, colours. A
modification to the filter structure shown in Figure 5
allows these colours to be accessed.

In this second example filter structure the

15   arrangement of the components is slightly different. In
this example (shown in Figure 6), the pre-polariser 7 is
followed by a first TN LCD 1, the two wave birefringent
plate 6, a quarter wave birefringent plate 10, a second
TN LCD 1, and a post-polariser 8. In this arrangement the

20   first TN LCD 1 controls the colour saturation and the
second the hue. In this way a wide range of colours can
be produced.

The example filter structures shown in Figure 4,5
and 6 have in common the series combination of a high

25   order wave plate (for example a two-wave plate 6) and a
quarter wave plate 10 with the principal axes inclined at
relative 45 degree rotation

It is clear that this filter structure can be used
in the production of LCD information displays, such as

30   advertising signs, computer screens, etc., where it
allows colour to be added to a black and white display at
low cost with little added manufacturing complexity.

A typical example is shown in Figure 7, where the
invention can be used to advantage. Traditional LCD

35   overhead projector panels have had low optical efficiency
and therefore require a high power projector. A
projection panel incorporating birefringent colour tuning

11 on an overhead projector 12 can give a factor of three enhancement in the brightness of the projected image 13.

The invention may also be used for example in technical applications where wavelength switching or

5   tuneable filtering is required, such as in multiplexed fibre optic transmitters and receivers, which typically operate outside the range of visible illumination.

The invention also finds application in illumination systems where the colour of a lamp may be continuously

10   changed by electronic control. The invention can be applied to any illumination system which has a directed light source, for example spot lamps, torches, fibre optic illuminators and endoscopes.

An example of this is illustrated in Figure 8, where

15   a conventional spot luminaire 14 is filtered by a birefringent colour filter 15 and produces a range of illumination colours 16.

In application to luminaires 14, the heat produced by the luminaire 14 in the form of radiation can be

20   damaging to the components of the filter 15 and there is, therefore in addition, provided a pre-polariser 30 which diverts the unwanted polarisation and the infra-red light away from the TN LCD 1 (Figure 9). This uses the well known Brewster effect, where unpolarised light 17

25   incident on a dielectric 18 becomes partially polarised in transmission 4, the unwanted light 19 being substantially reflected from the plates 18. The use of a number of dielectric plates 18, which may, for example, be cut, transparent, plastic sheeting, allows the light

30   from the lamp 17 to be strongly polarised before reaching the filter without excessively heating the optical components of the filter. A second, dichroic pre-polariser 20 is used to ensure that a high degree of polarisation is maintained for angles away from the

35   Brewster angle.

The effect of this pre-polariser component is demonstrated in Figure 10 where three plates of

14

polycarbonate 18 have been used to polarise a beam 17.
The transmission of the required polarisation 4 and the
unused polarisation 19 is shown plotted against the angle
of inclination of the stack. The power in a polarisation

5   without the stack present is also plotted for comparison
21.

By modifying the configuration of the pre-polariser
30 as shown in Figures 11 and 12 a similar heat shielding
effect can be achieved. Since the same surface area can

10   be provided with reduced depth of plate when multiple
portions are used, as in the "V" and "W" configurations
illustrated, the resultant pre-polariser 30 will be less
bulky than one using a single plate and will, therefore,
contribute to a more compact filter.

15   An alternative to these "Brewster plates" 30 is
shown in Figure 13. In this diagram, the Brewster plates
30 (and possibly the absorbing polariser 20) are replaced
by a commercially available polarising beam splitter cube
22.

20   Further steps may be taken to control the
temperature of the heat sensitive polarisers 7 and to
make the polarisers heat resistant. Figure 14
illustrates a scheme whereby the polarisers 7,8 are not
laminated to the waveplates 6,10 and LCD 1: Air gaps 23

25   are retained adjacent to the polarisers 7, 8 and these
gaps 23 are continuously flushed with air driven by a fan
24 to maintain a high level of thermal transfer between
the polariser and the air. A similar effect is achieved
by the configuration illustrated in Figure 15. A fluid

30   cell 25 is provided adjacent to the polariser 7.
Convection currents in the fluid help to redistribute the
heat into the greater thermal mass of the cell. The
fluid cell 25 may be modified such that fins are attached
to increase its surface area to enhance air cooling.

35   Figure 16 shows the use of a sacrificial polariser
26. This polariser 26 may be of reduced quality but
increased heat resistance in order to protect the higher

15

quality heat sensitive polarisers 7 which comprise the
optical filter. In a lighting system, such a disposable
polariser 26 may have a similar life to that of the bulb
and could be attached to the light source to form a
5   removable unit which can easily be replaced when
required.

Another means of controlling the temperature of the
polariser 7 is to expand the incident beam 17 from the
luminaire 14 as it passes through the colour filter 15 as
10   illustrated in Figure 17.

In the filter of the invention, low power
consumption and lack of moving parts means that the
filter 15 is useful for applications where power is at a
premium. This also means that, in lighting systems, the
15   filter 15 can be powered via a photosensitive cell, such
as an array of photodiodes 27 (commonly referred to as a
solar cell) which collects stray light from the lamp 17,
or conveniently, light rejected 19 by pre-polarising
elements 30. In addition to the above benefits another
20   advantage of the filter of the invention over known
motorised colour filter systems is that it is less bulky,
more reliable and does not require a relatively large
additional power supply and built-in control and power
wiring. A typical low power drive circuit that may be
25   employed in a system according to the invention is shown
in Figure 18 where light is converted to energy by the
solar cell 27 which passes through drive circuitry 28 to
the LCD 1.

In place of a solar cell 28, any device capable of
30   producing electricity from heat or light could be used,
for example a thermopile or pyro-electric device.

A filter 15 for use in lighting, shown schematically
in Figure 19, can therefore be self contained, having the
optical elements of Brewster pre-polariser 30, birefringent
35   network 29, TN LCD 1, and post-polariser 8. The TN LCD 1 is
driven by power derived from a solar cell 27 and controlled
by receiver 28 detecting signals from a remote transmitter.

16

In this way, incoming white light 17 from a separate luminaire can be filtered to provide coloured light 16 on demand.

The efficiency of such a lighting system may be
5   improved by recycling the light which has been rejected 19 by the pre-polarising elements 30. Figure 20 illustrates the use of a reflector 29 to pass the light rejected by the pre-polariser 30 through the filter 15. A half wave plate 31 is used to convert this reflected
10   light to the same polarisation as the remainder of the light entering the filter 15.

A further example of improving the efficiency of a lighting system is illustrated in Figure 21. Reflectors 29 are positioned in such a way that the rejected light
15   19, from the pre-polariser 30, is returned to the light source 14 where it will be depolarised and re-emitted towards the filter 15 (not shown in Figure 21).

CLAIMS

1.   A tuneable optical filter having a variable
wavelength transmittance comprising:
5   a pre-polariser;
          a post-polariser;
          a birefringent plate positioned between the pre-
polariser and the post-polariser;
          a twisted nematic liquid crystal cell (TN LCD)
10 positioned between the pre-polariser and the post-
polariser the TN LCD being controlled, in use, to tune
the filter; and
          a quarter wave plate positioned adjacent the
birefringent plate.
15

2.   An optical filter according to claim 1, wherein one
of the pre-polariser and the post-polariser has its
polarising axis inclined at substantially 45° to the
optical axis of the birefringent plate.
20

3.   An optical filter according to claim 2, comprising a
second TN LCD wherein the birefringent plate is
positioned between the first and second TN LCDs.

25 4.   An optical filter according to claim 1, 2 or 3,
further comprising a further TN LCD in series with the
first TN LCD.

5.   An optical filter according to any one of the
30 preceding claims, wherein the pre-polariser comprises at
least one sheet of dielectric material inclined at the
Brewster angle to incoming light.

6.   An optical filter according to claim 5, wherein the
35 pre-polariser also comprises a dichroic polariser.

18

7.   An optical filter according to claim 5 or claim 6,
wherein the dielectric material is configured in a "V"
shape, a "W" shape or other successive joined "V" shapes,
wherein portions of the dielectric material are inclined
5   at the Brewster angle to incoming light.

8.   An optical filter according to any one of the
preceding claims, wherein the birefringent plate is a two
wave plate.

10

9.   An optical filter according to any one of the
preceding claims, wherein the pre-polariser comprises a
heat resistant pre-polariser.

15   10.   An optical filter according to any one of the
preceding claims, wherein at least one of the pre-
polariser and the post-polariser is wavelength
independent.

20   11.   An optical filter according to any one of the
preceding claims, wherein the birefringent plate is
wavelength independent in terms of amplitude modulation.

12.   A lighting system comprising:
25   a light source; and
           an optical filter according to any one of the
preceding claims.

13.   A lighting system according to claim 12, further
30   comprising selecting means for receiving, in use, a
colour selection from a user and driving the filter to
provide the desired colour for the lighting system.

14.   A lighting system according to claim 12 or claim 13,
35   when dependent on claim 9, wherein the light source and
the heat resistant pre-polariser form a removable unit.

15. A lighting system according to any of claim 12 to
claim 14, further comprising a photocell, wherein the
photocell receives light from the light source and
converts this light to energy, to drive the optical

5   filter, in use.
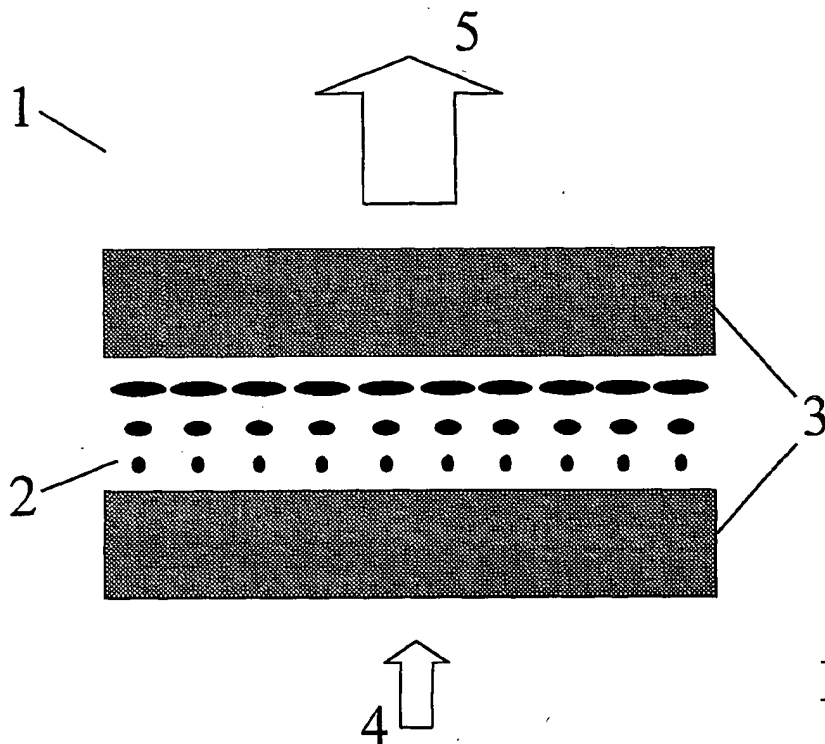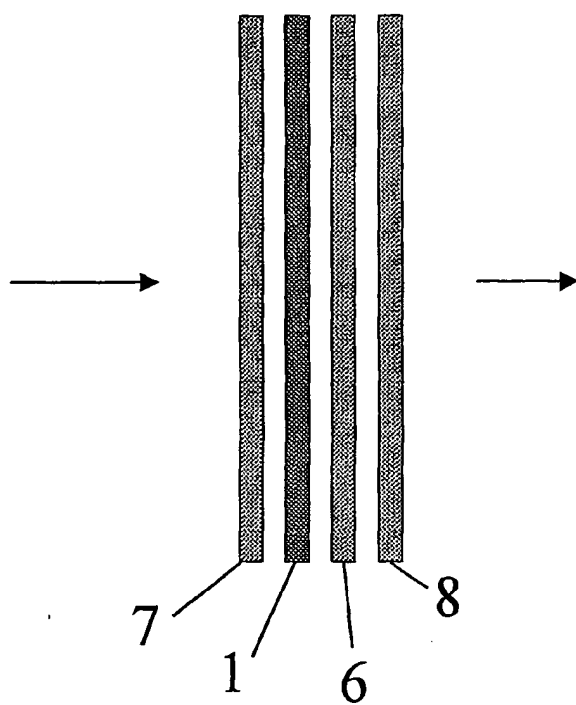
Figure 1
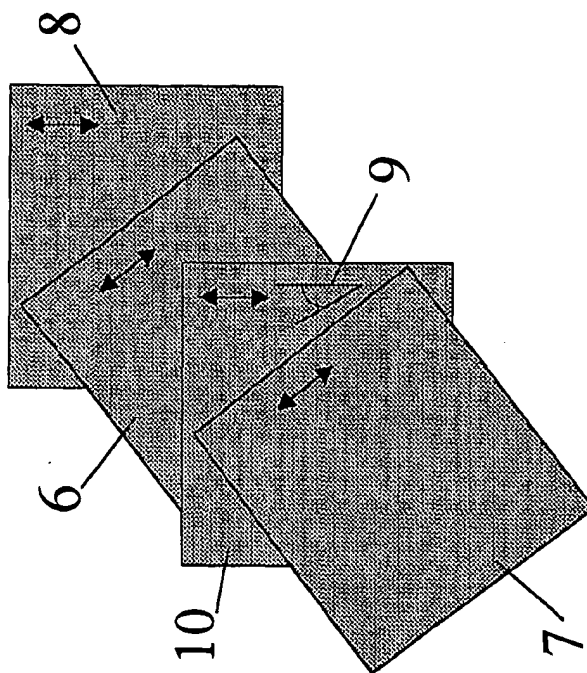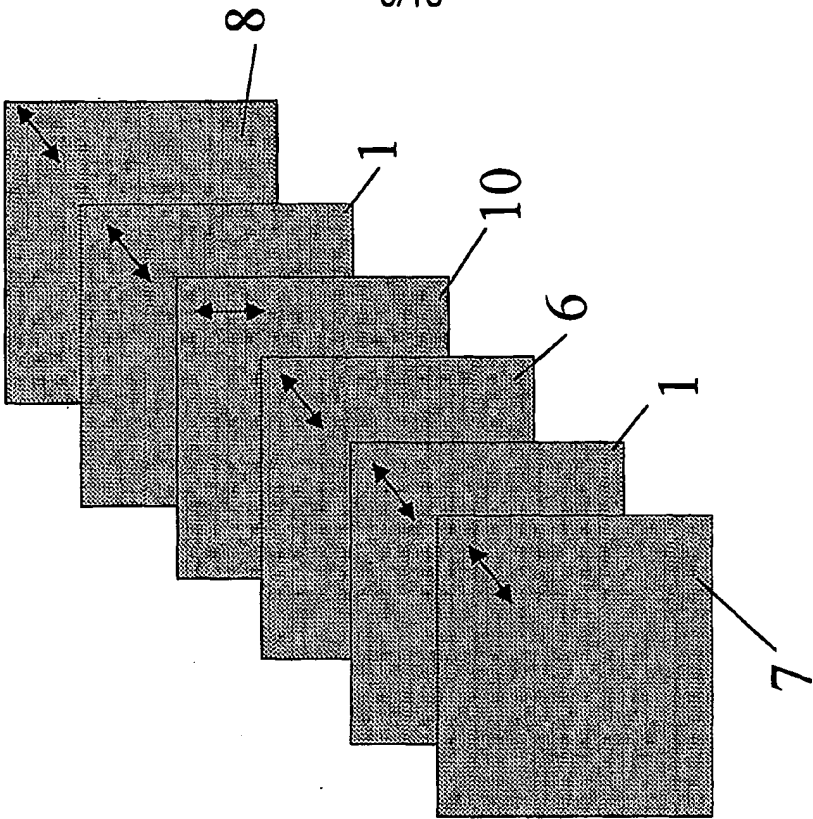
Figure 2
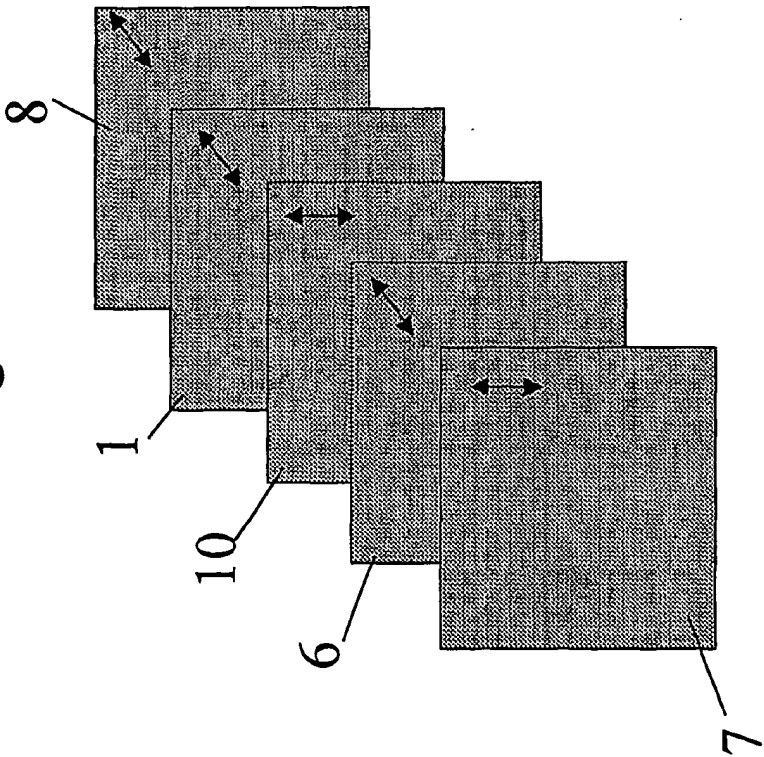
Figure 3

Figure 4

Figure 6

Figure 5
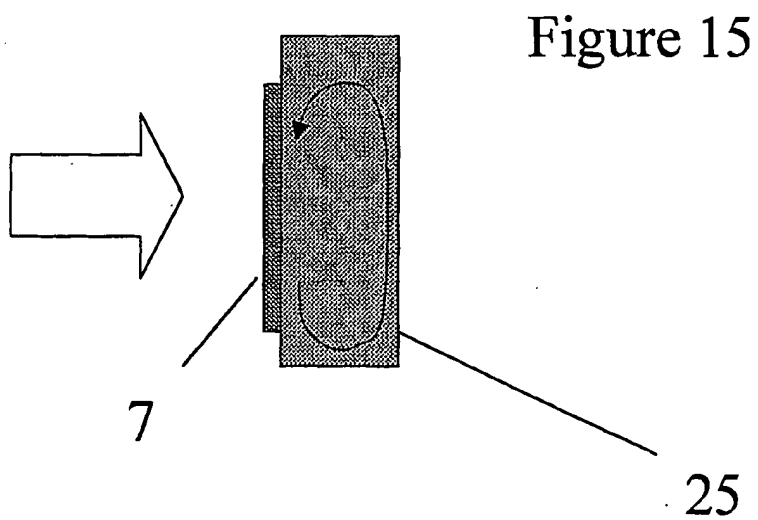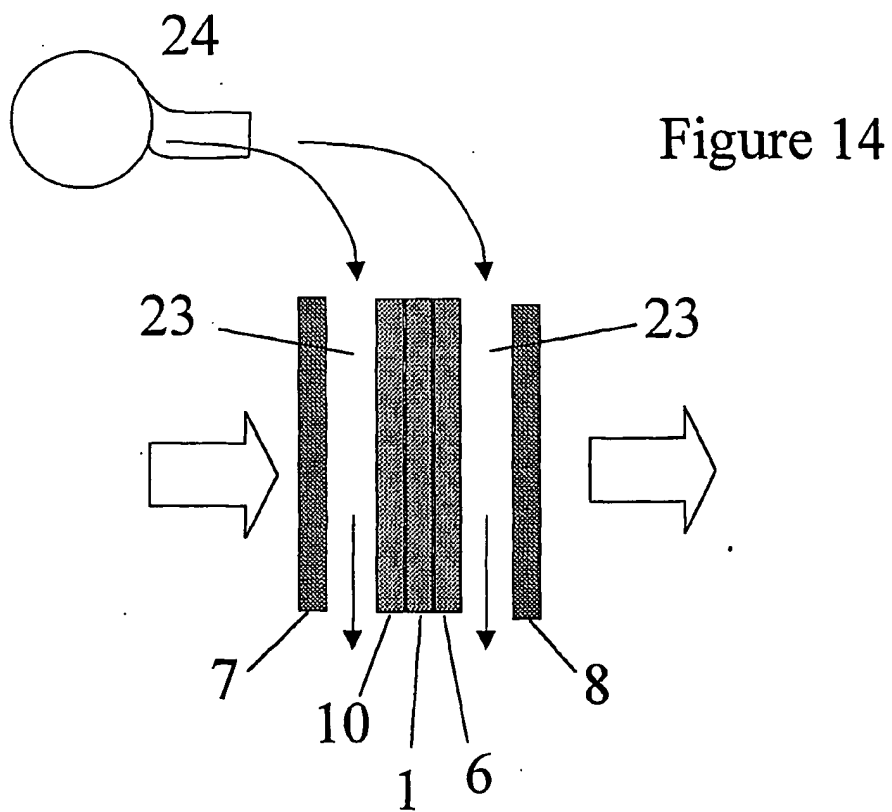
Figure 7
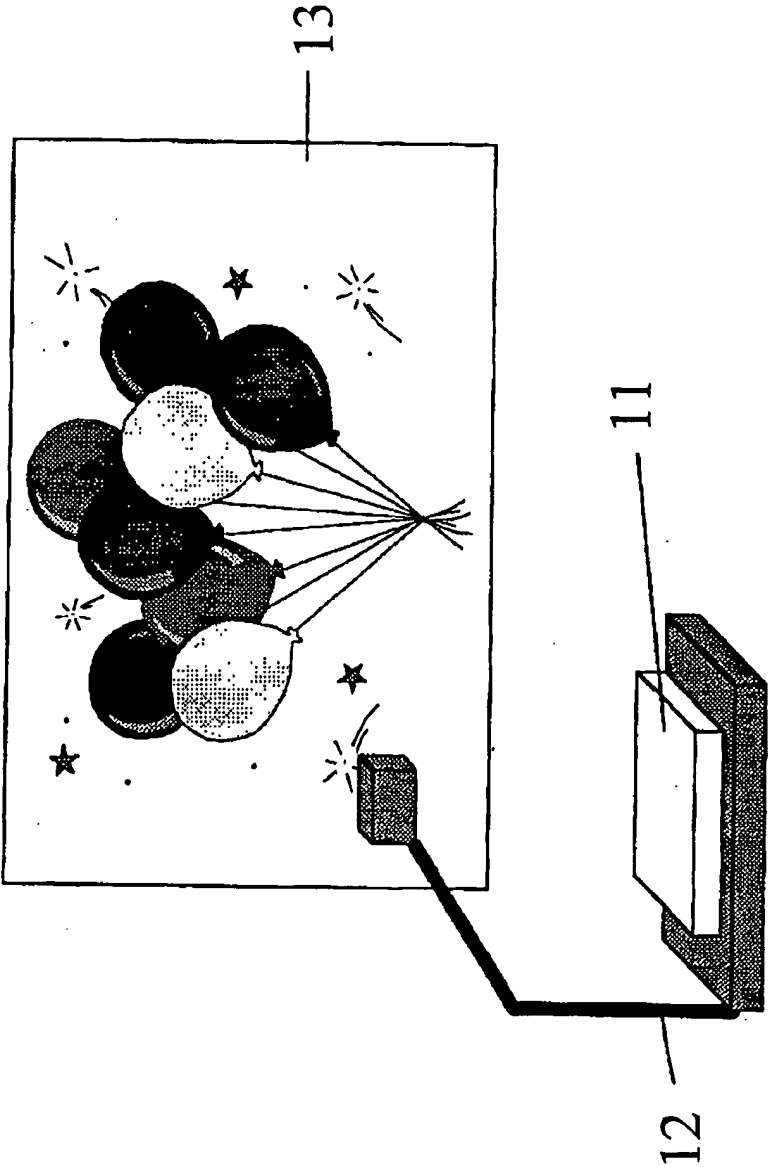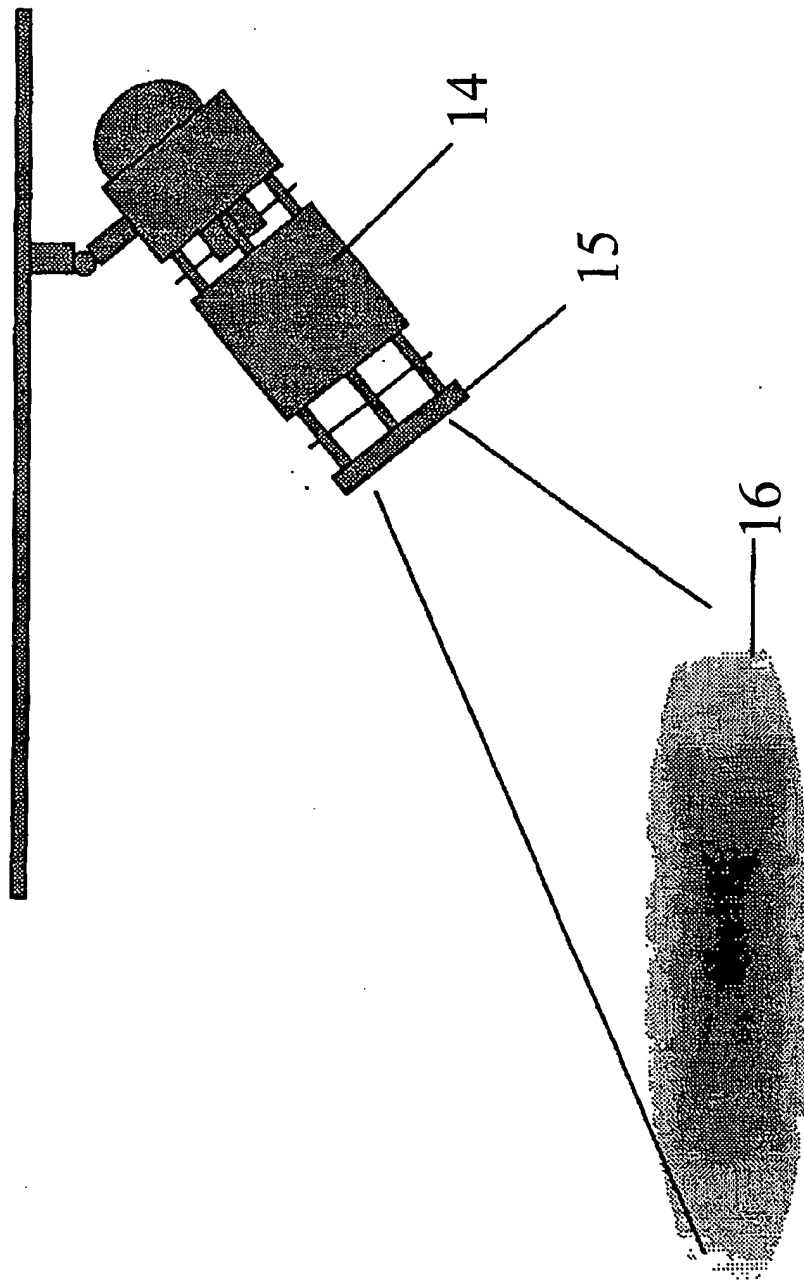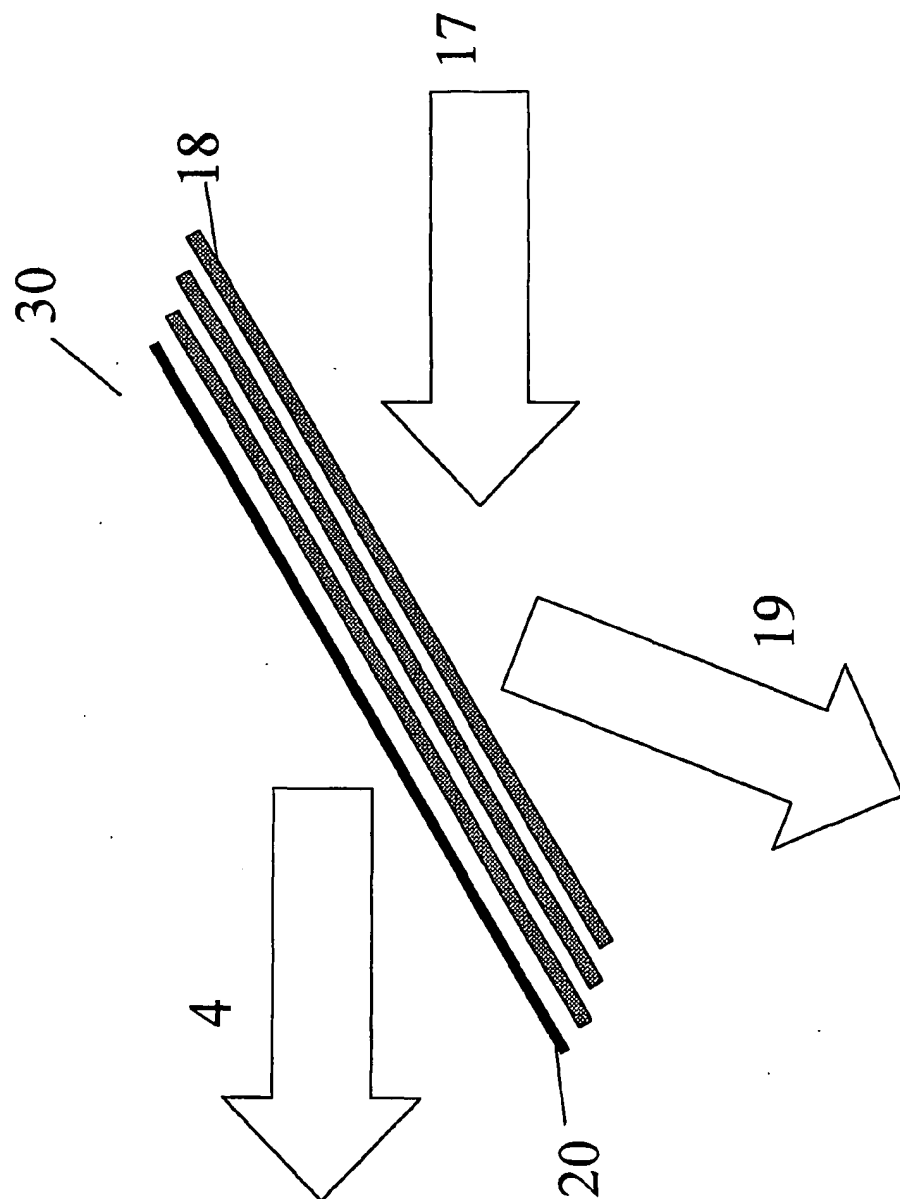
Figure 8
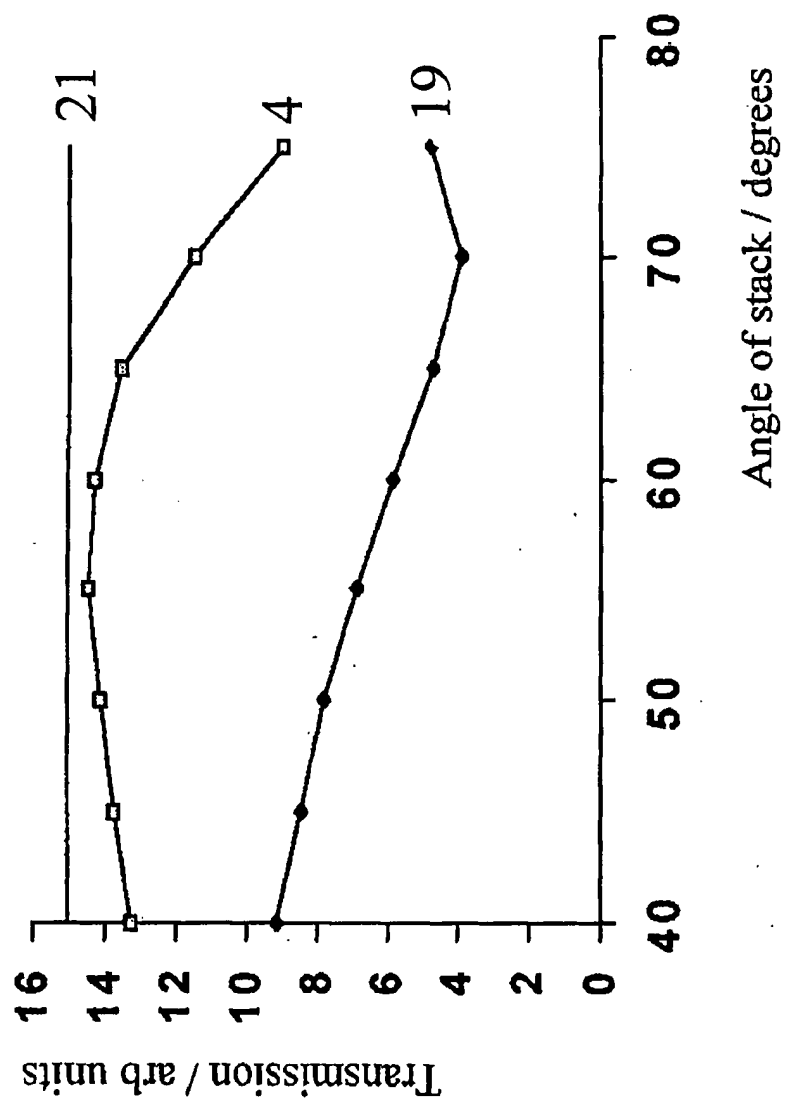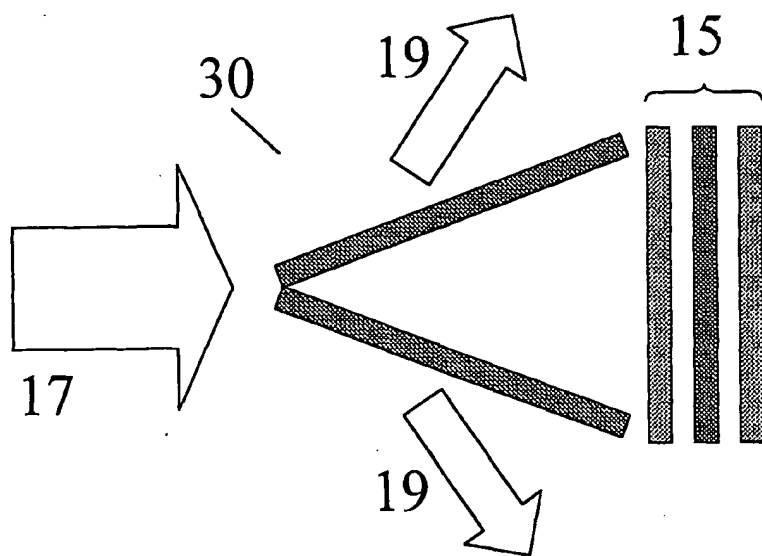
Figure 9
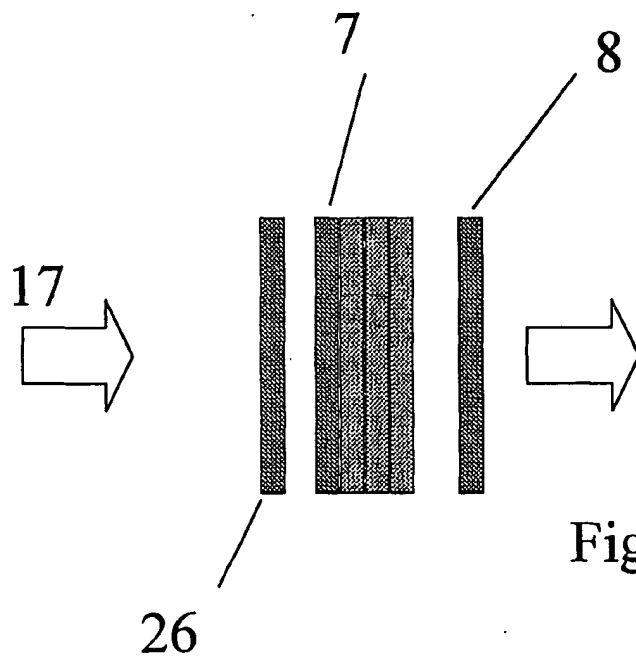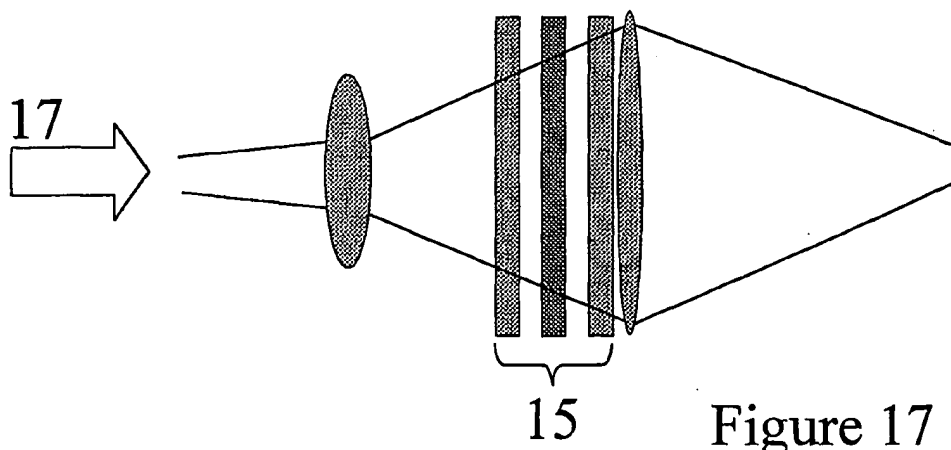
Figure 10

Figure 11

Figure 12

9/15
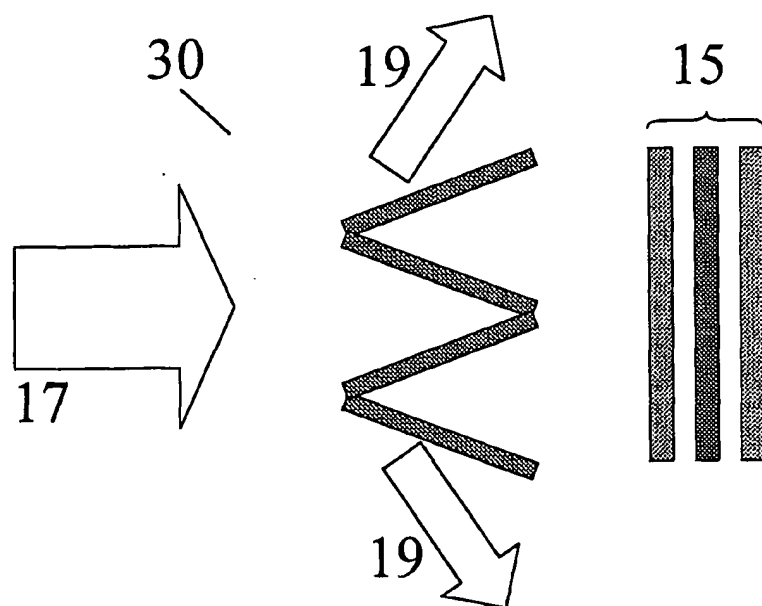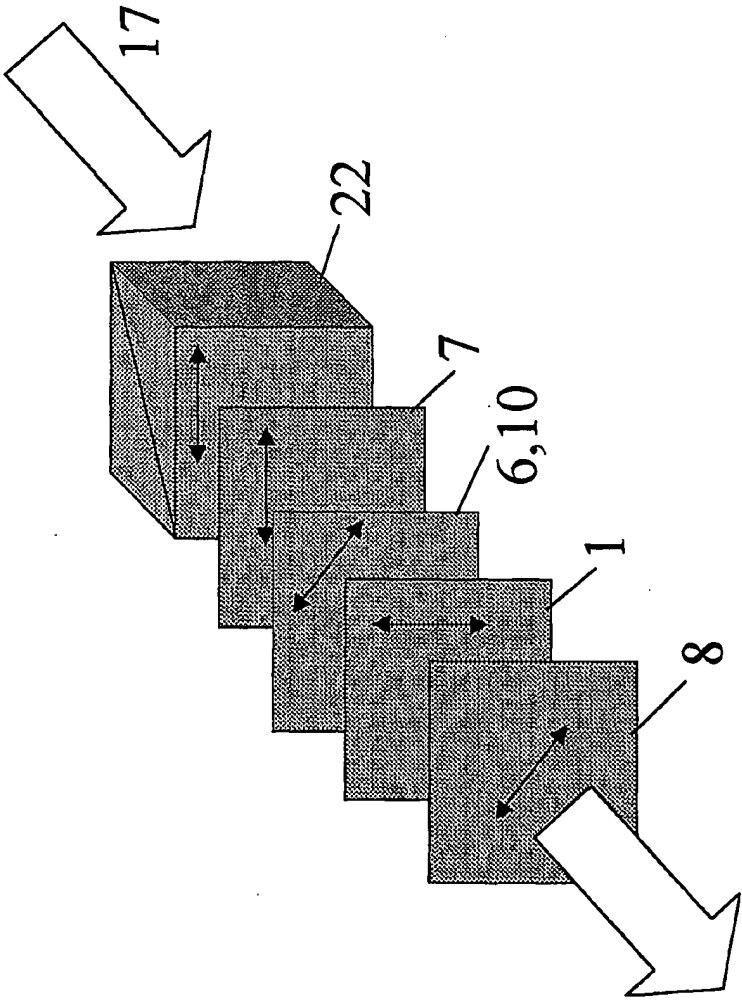
Figure 13

Figure 14

Figure 15

Figure 16

Figure 17

Figure 18
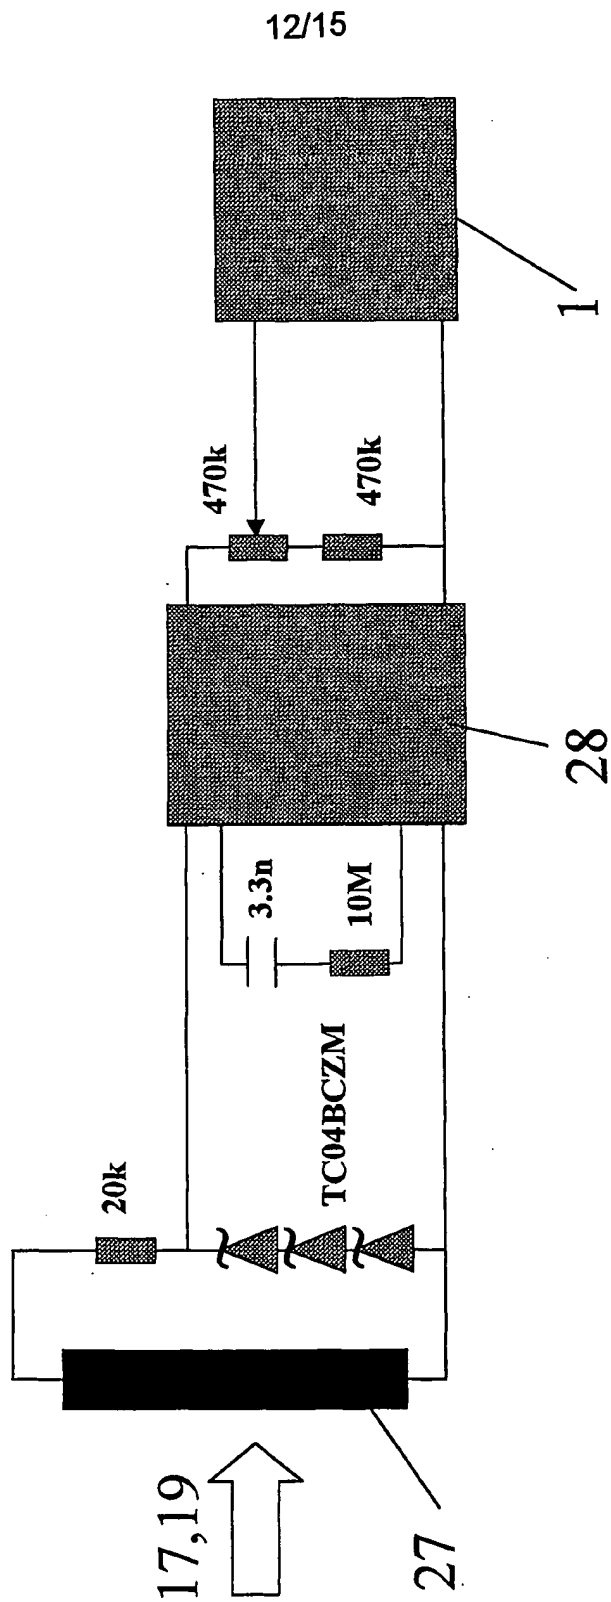
Figure 19
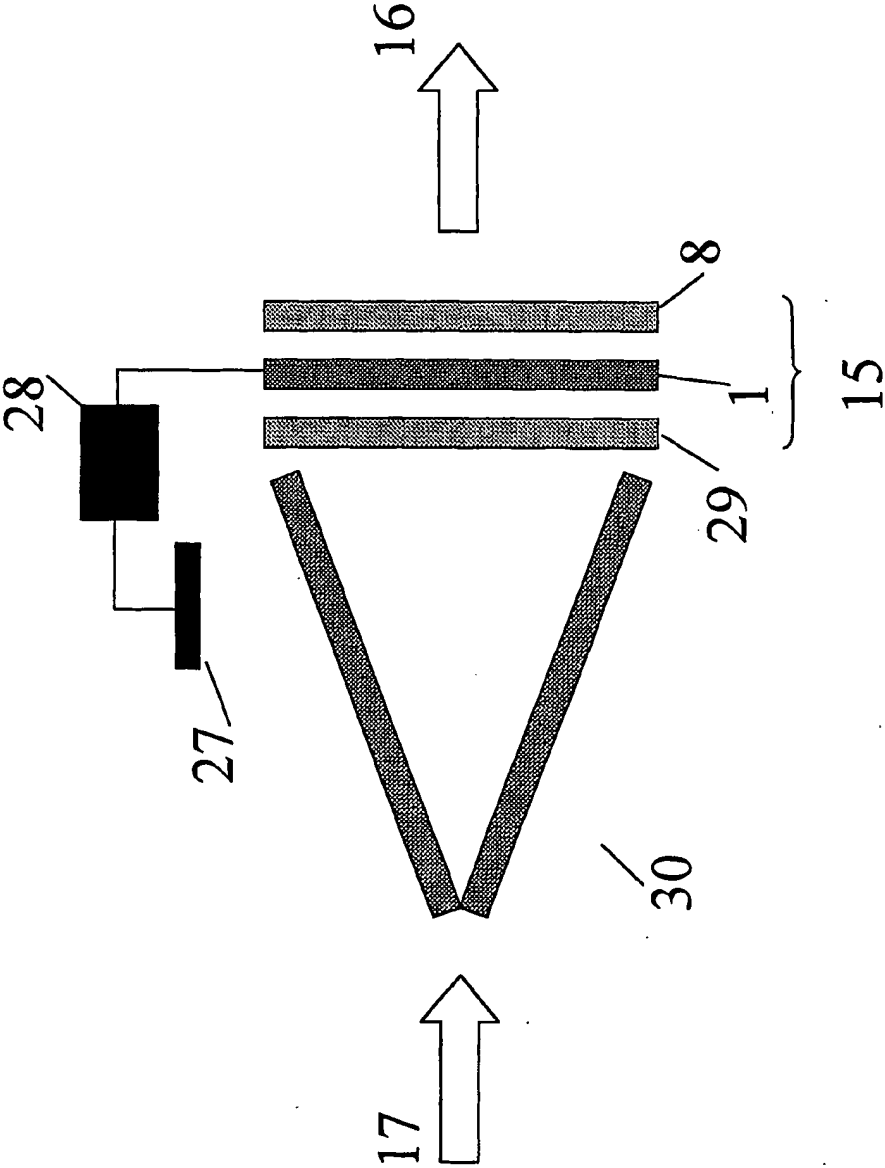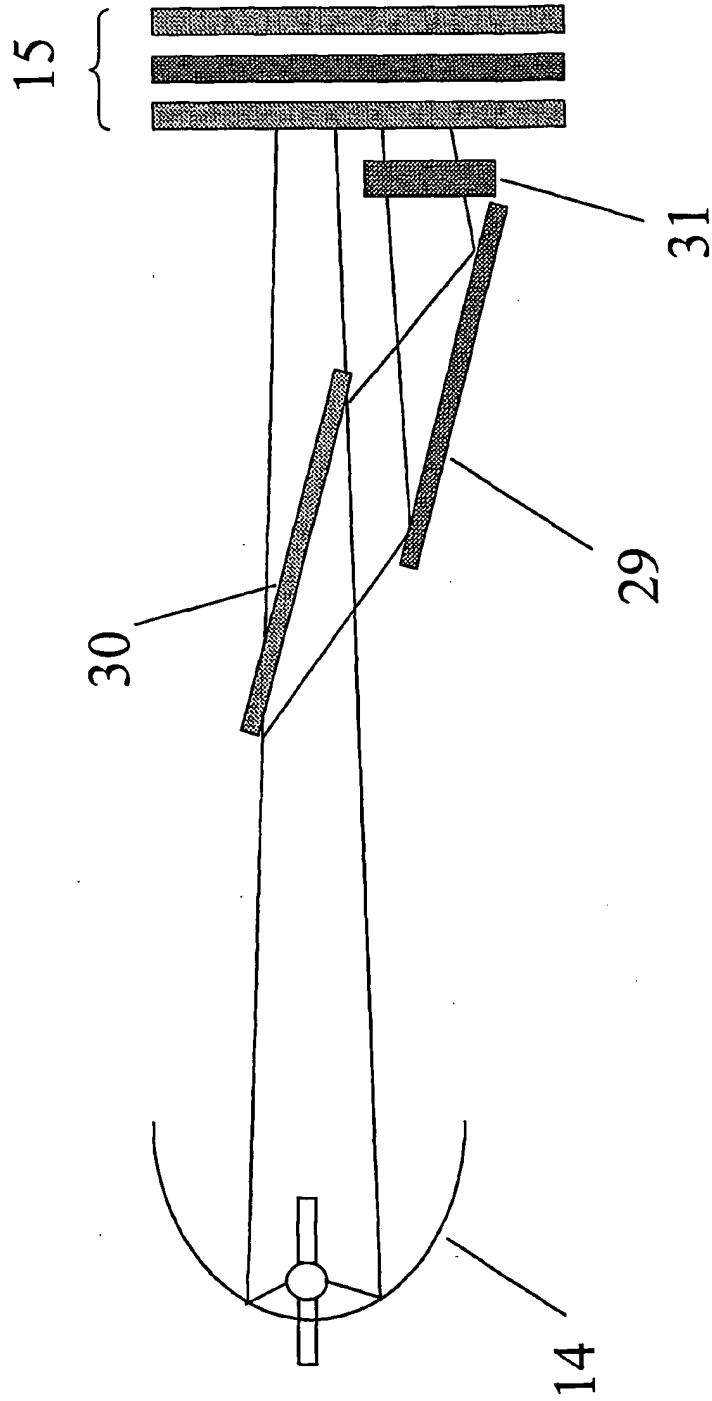
Figure 20

Figure 21
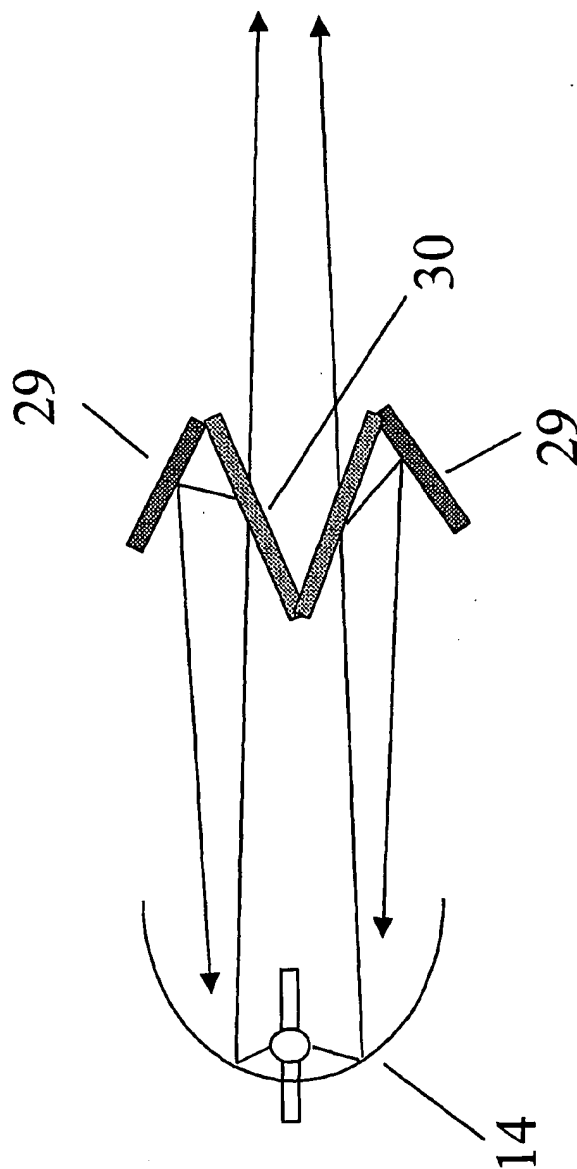
INTERNATIONAL SEARCH REPORT

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7   G02F1/13363   G02F1/1347   G02F1/23

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 7   G02F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

INSPEC, EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	TITLE A M ET AL: "Tunable birefringent filters" OPTICAL ENGINEERING, NOV.-DEC. 1981, USA, vol. 20, no. 6, pages 815-823, XP002162240 ISSN: 0091-3286 page 821, left-hand column; figure 16	1,2,12
A	SHARP G D ET AL: "CONTINUOUSLY TUNABLE SMECTIC A* LIQUID-CRYSTAL COLOR FILTER" OPTICS LETTERS,US,OPTICAL SOCIETY OF AMERICA, WASHINGTON, vol. 15, no. 10, 15 May 1990 (1990-05-15), pages 523-525, XP000132531 ISSN: 0146-9592 the whole document	1-15

-/--

[X] Further documents are listed in the continuation of box C.   [X] Patent family members are listed in annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search	Date of mailing of the international search report
29 March 2001	11/04/2001

Name and mailing address of the ISA	Authorized officer
European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Tx. 31 651 epo nl, Fax: (+31-70) 340-3016	Diot, P

Form PCT/ISA/210 (second sheet) (July 1992)

Interna pplication No

PCT/GB 00/05005

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication,where appropriate, of the relevant passages	Relevant to claim No.
A	WO 95 10065 A (UNIV COLORADO ;SHARP GARY D (US); JOHNSON KRISTINA M (US)) 13 April 1995 (1995-04-13) page 11, line 22 - line 25 ---	1,12
A	US 5 892 612 A (BUHRER CARL ET AL) 6 April 1999 (1999-04-06) column 5, line 14 - line 21 column 8, line 66 -column 10, line 13 ---	1,12
A	SHANKS I A: "Electro-optical colour effects by twisted nematic liquid crystal" ELECTRONICS LETTERS, 4 APRIL 1974, UK, vol. 10, no. 7, pages 90-91, XP002162241 ISSN: 0013-5194 the whole document -----	1,12

INTERNATIONAL SEARCH REPORT

Information on patent family members

Patent document cited in search report		Publication date	Patent family member(s)		Publication date
WO 9510065	A	13-04-1995	US	5619355 A	08-04-1997
			AU	7968094 A	01-05-1995
			CA	2173586 A	13-04-1995
			CN	1132556 A	02-10-1996
			EP	0746793 A	11-12-1996
US 5892612	A	06-04-1999	NONE		